

Manual Pallet Truck

Perfect tool for efficient and reliable cargo transport. Engineered for seamless handling, enhanced reliability, durability, and cost-effective performance—all in one robust solution for smooth operations in warehouses and logistics.

Key Features:

- **Seamless Integration:** Integrated cast pump design eliminates welding, ensuring leak-free operations.
- **Enhanced Structural Integrity & Design:** Optimized frame structure for increased reliability and strength. Inclusion of entry and exit roller for single or double fork rollers.
- **Controlled Lowering:** Adjustable fork lowering speed with an overload valve for preventing overloading incidents.
- **Convenient Handling:** Handle seat includes a hole for easy control chain installation, prioritizing user convenience.

For more information, please visit: www.uslindustrial.com

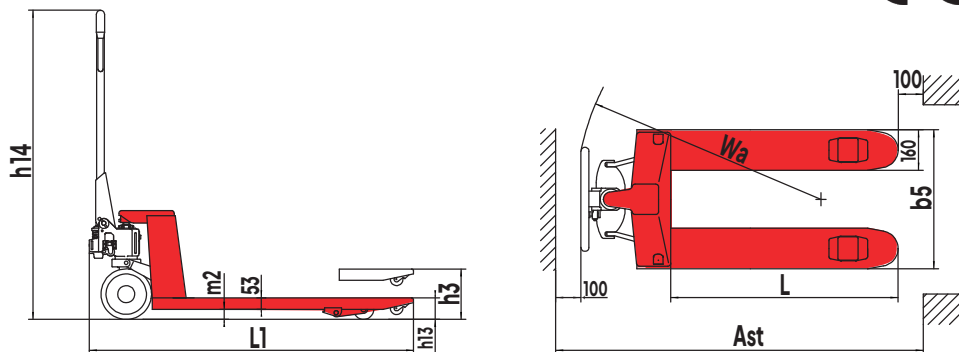


Figure 1.

Manual Pallet Truck

Model
LI-HPT



Smooth Transit, Seamless Control
Pallet Trucks

Model		LI-HPT	
Capacity		2500/ 3000 (kg) 5511.6/ 6613.9 (lb)	2500/ 3000 (kg) 5511.6/ 6613.9 (lb)
Lowered fork height	h13	85 (mm) 3.3 (in)	75 (mm) 3 (in)
Steering wheel		Φ 180 (mm) Φ7.1 (in)	Φ180 (mm) Φ7.1 (in)
Fork wheel single		Φ74× 93 (mm) Φ2.9 x 3.7 (in)	Φ74× 93 (mm) Φ2.9 x 3.7 (in)
Fork wheel tandem		Φ74 x 70 (mm) Φ2.9 x 2.8 (in)	Φ74 x 70 (mm) Φ2.9 x 2.8 (in)
Max. lift height	h3	195 (mm) 7.7 (in)	185 (mm) 7.3 (in)
Total height	h14	1214 (mm) 3 ft 11.8 in	1214 (mm) 3 ft 11.8 in
Overall length	L1	1543/ 1613 (mm) 5 ft 0.7 in/ 5 ft 3.5 in	1543/ 1613 (mm) 5 ft 0.7 in/ 5 ft 3.5 in
Fork length	L	1150/ 1220 (mm) 3 ft 9.3 in/ 4 ft	1150/ 1220 (mm) 3 ft 9.3 in/ 4 ft
Width overall forks	b5	520/ 550/ 685 (mm) 1 ft 8.5 in/ 1 ft 9.7 in/ 2 ft 3 in	520/ 550/ 685 (mm) 1 ft 8.5 in/ 1 ft 9.7 in/ 2 ft 3 in
Ground clearance, centre of wheelbase	m2	32 (mm) 1.3 (in)	22 (mm) 0.9 (in)
Aisle width for pallets 1000×1200 crossways	Ast	1743/ 1813 (mm) 5 ft 8.6 in/ 5 ft 11.4 in	1743/ 1813 (mm) 5 ft 8.6 in/ 5 ft 11.4 in
Aisle width for pallets 800×1200 lengthways	Ast	1793/ 1813 (mm) 5 ft 10.6 in/ 5 ft 11.4 in	1793/ 1813 (mm) 5 ft 10.6 in/ 5 ft 11.4 in
Turning radius	Wa	1276/ 1346 (mm) 4 ft 2.2 in/ 4 ft 5 in	1276/ 1346 (mm) 4 ft 2.2 in/ 4 ft 5 in
Service weight		56 – 70 (kg) 123.5 – 154.3 (lb)	56 – 70 (kg) 123.5 – 154.3 (lb)

*Refer to Figure 1. for additional info for abbreviation references (eg. h14).



Adjustable Straight
Tappet



Additional Entry
and Exit Roller



Adjustable Pump
Cap